




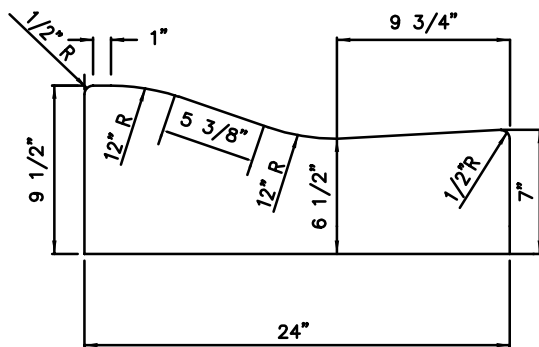


TYPICAL 24" ROLL-BACK CURB

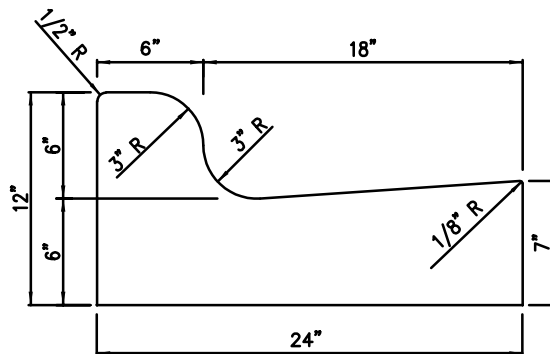


TYPICAL 24" VERTICAL CURB

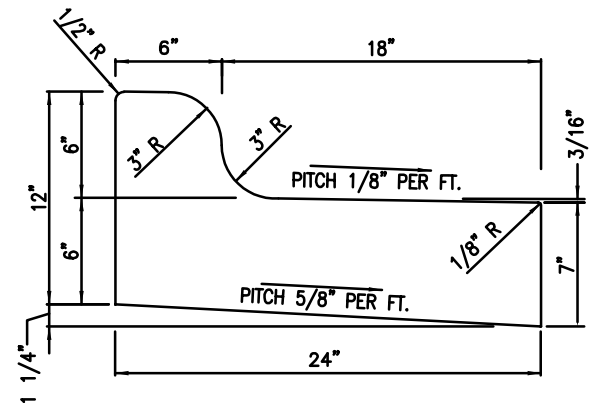


TYPICAL 24" SPILL-OFF CURB

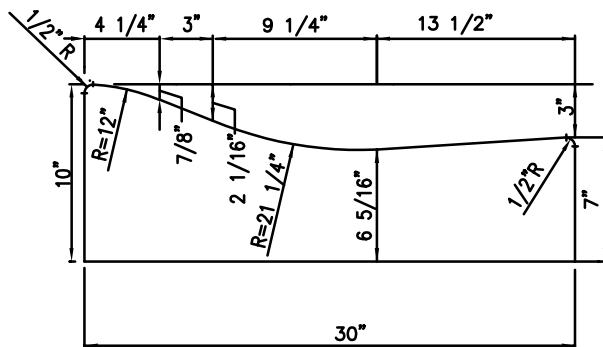

TYPICAL 30" ROLL CURB

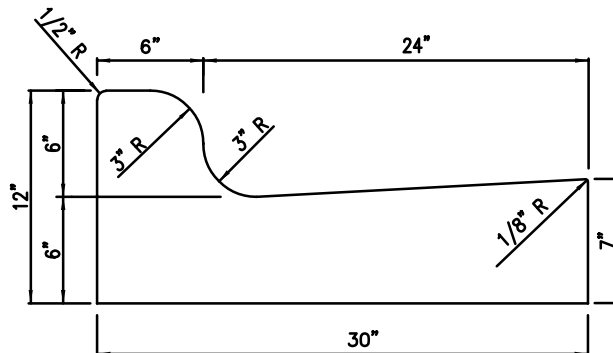

TYPICAL 30" VERTICAL CURB

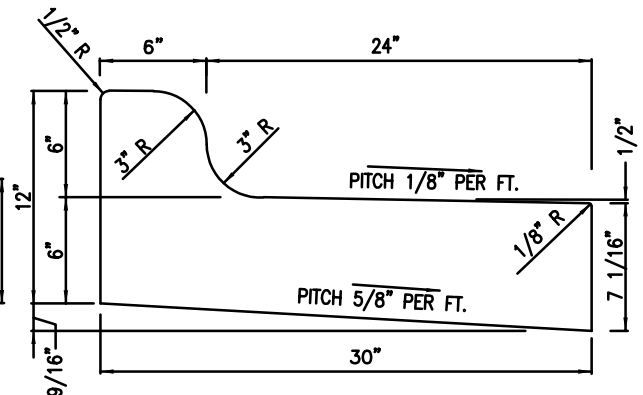

TYPICAL 30" SPILL-OFF CURB

NOTES

1. ALL CURBS CONSTRUCTED OF 2500 PSI CONCRETE.
2. PLACE GROOVE JOINTS 1" DEEP AT 12'-6" INTERVALS BETWEEN EXPANSION JOINTS.
3. CURB SHALL BE DEPRESSED AT INTERSECTIONS TO PROVIDE FOR FUTURE ACCESSIBLE RAMPS.
4. TOP 6" OF SUBGRADE BENEATH THE CURB AND GUTTER SHALL BE COMPACTED TO 100% STANDARD PROCTOR DENSITY.
5. ADOPTED FROM NCDOT STANDARD NO. 846.01



ENGINEERING DIVISION
433 HAY ST. 28301
(910) 433-1656

<http://www.fayettevillenc.gov>

24" AND 30" CURB DETAILS

Not to Scale
Review Date: JULY 2024

SD-1