



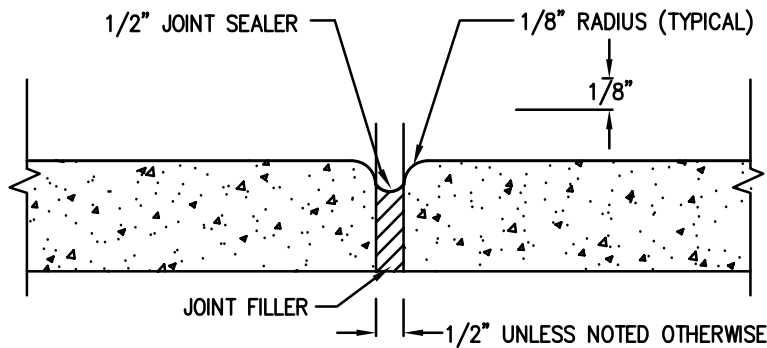

EXPANSION JOINT

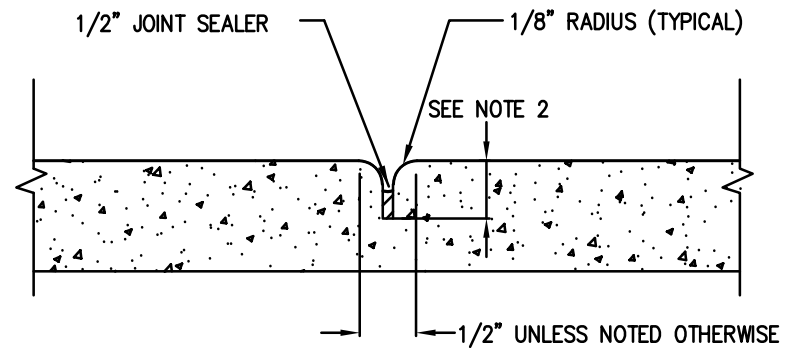

CONTRACTION JOINT

NOTES:

1. PLACE CONTRACTION JOINTS AT 10' INTERVALS, EXCEPT THAT A 15' SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 10' INTERVALS.
2. JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER.
3. CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OF FORMED BY OTHER APPROVED METHODS.
4. FILL ALL CONSTRUCTION JOINTS, EXCEPT IN 8" × 6" MEDIAN CURB, WITH JOINT FILLER AND SEALER.
5. SPACE EXPANSION JOINTS AT 90' INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.
6. REFER TO NCDOT DETAILS 846.01 AND 848.01 FOR MORE INFORMATION.



ENGINEERING DIVISION
433 HAY ST. 28301
(910) 433-1656
<http://www.fayettevillenc.gov>

**CONTRACTION AND
EXPANSION JOINT**

Not to Scale
Review Date: JULY 2024

SD-3