


TREE PRESERVATION / PROTECTION- When existing trees are located within the "Limits of Construction", protective fencing is required around the tree(s) as follows:


PRIOR TO CONSTRUCTION:

The contractor or subcontractor shall construct and maintain, for each protected tree or group of trees on a construction site, a protective fencing which encircles the outer limits of the critical root zone of the trees to protect them from construction activity. All protective fencing shall be in place prior to commencement of any site work and remain in place until all exterior work has been completed.

PROTECTIVE FENCING:

Orange Vinyl construction fencing, chain link fencing, snow fencing or other similar fencing at least four feet (4') high and supported at a maximum of ten-foot (10') intervals by approved methods sufficient enough to keep the fence upright and in place. The fencing shall be of a highly visible material, and shall have a tree protection sign affixed to the fence every fifty (50) feet in such a manner to be clearly visible to the workers on-site.

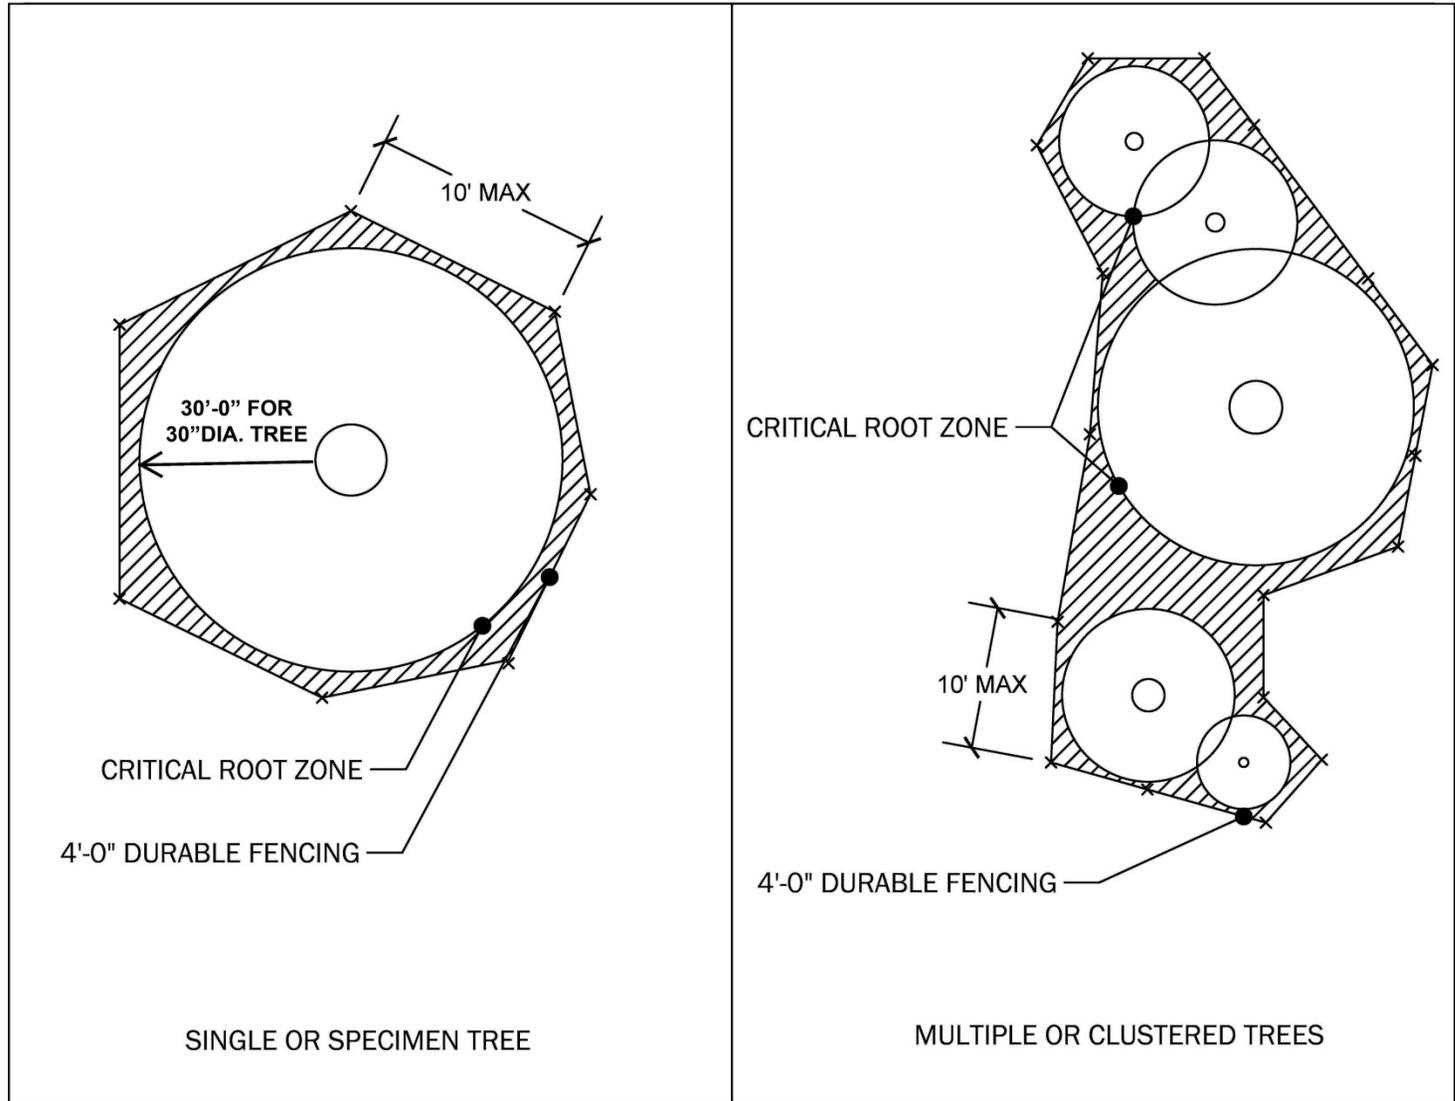

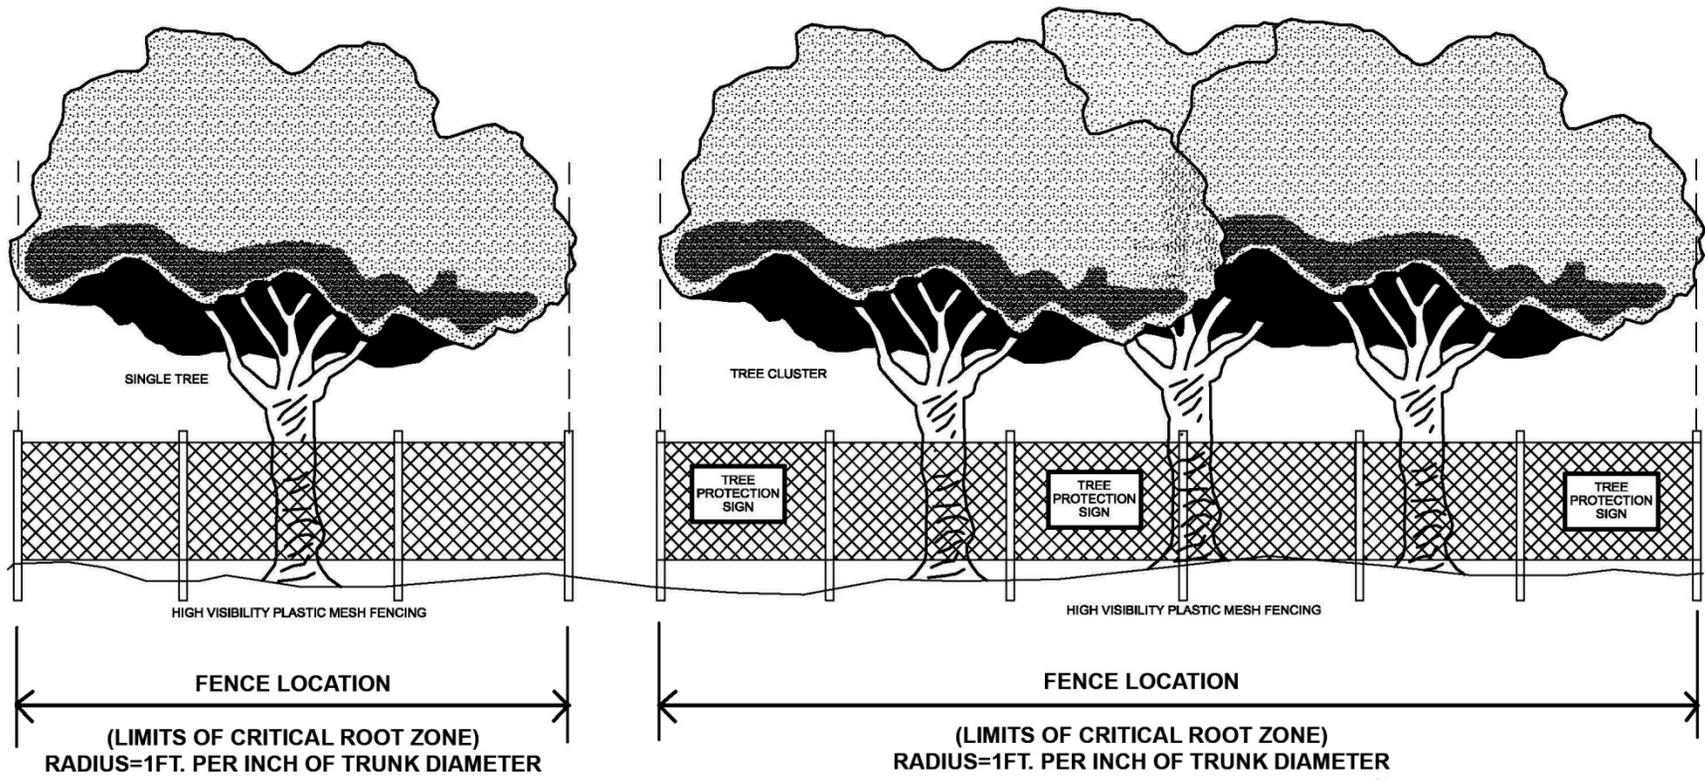

TYPICAL TREE PROTECTION FENCING

NO SCALE